

2.0x2.5 SMD Crystal



中山市锐晶电子有限公司
Zhongshan Rojon Electronics Co., LTD.

FEATURE

- Rugged AT-cut crystal construction.
- Miniature 2.5×2.0mm ceramic package.
- Designed for automatic mounting and reflow soldering.
- Embossed tapping specification.
- Pb-free and RoHS/Green compliant.

APPLICATIONS

- Ideally suited designed for Bluetooth wireless communication sets, HDD, DSN, PDA, GPS, Digital Tuner, Wireless LAN and mobile phone.

•Electrical Specifications 电气参数

型号	Holder Type	2.0x2.5mm Ceramic Surface Mount
频率范围	Frequency Range	16MHz to 54MHz
调整频差	Frequency Tolerance (ΔF) (at 25°C)	$\pm 10\text{ppm}$ to $\pm 30\text{ppm}$
温度频差	Frequency Drift	$\pm 10\text{ppm}$ to $\pm 30\text{ppm}$ ※ (See Notes)
工作温度范围	Operating Temperature Range	-20°C - +70°C / -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C / -55°C - +125°C
老化	Aging (25°C)	$\pm 5\text{ppm}/\text{year}$ Maximum
静电容	Shunt Capacitance (C0)	7pF maximum
激励功率	Drive Level	10 μW (100 μW max.)
绝缘阻抗	Insulation Resistance (Rs)	500 Megaohms Minimum at D.C100V
负载电容	Load Capacitance (CL)	Suggested by customer


※Notes: ± 10 , ± 20 , $\pm 30\text{ppm}$ (-20°C to +70°C)
 ± 20 , ± 30 , $\pm 50\text{ppm}$ (-40°C to +85°C) or depends on customer

•Equivalent Series Resistance and Mode of Operation

等效阻抗和振荡模式


Frequency Range 频率范围	ESR (Ω) 等效阻抗	Mode 振荡模式
16.000MHz $\leq f < 20.000\text{MHz}$	100 Ω max	Fundamental
20.000MHz $\leq f < 30.000\text{MHz}$	80 Ω max	Fundamental
30.000MHz $\leq f < 40.000\text{MHz}$	60 Ω max	Fundamental
40.000MHz $\leq f < 54.000\text{MHz}$	40 Ω max	Fundamental

•Reflow Condition(回流焊条件)

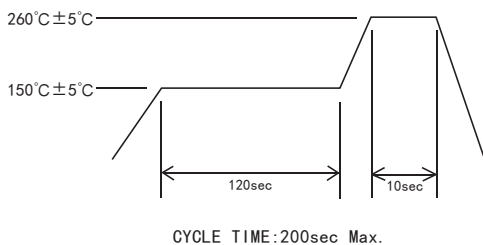

•Mechanical Dimensions 外型尺寸

UNIT (单位): mm (毫米)

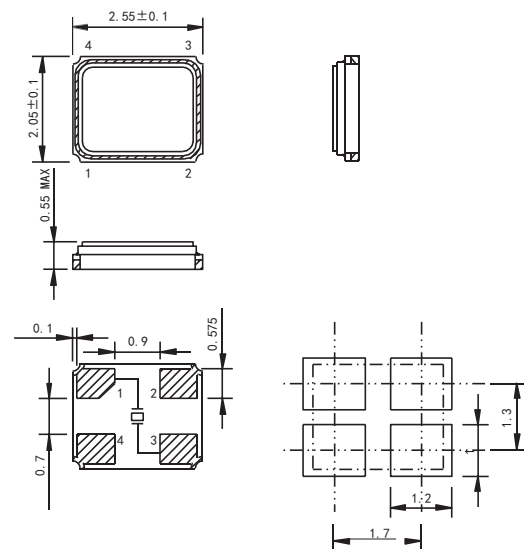

suggested solder pad layout

Note) #2, #4 is connected with a cover
(Please connect with a GND or a power supply)

