

7.0x5.0 SMD Crystal



中山市锐晶电子有限公司
Zhongshan Rojon Electronics Co.,LTD.

FEATURE

- Rugged AT-cut crystal construction.
- Extremely compact SMD package.
- High precision characteristic covering up to high frequency range.
- Automatic mounting.
- Embossed taping specification.
- Reflow soldering.
- Pb-free and RoHS/Green compliant.

APPLICATIONS

- Ideally suited designed for disc drives, PCMCIA, PCs and hand-held electronic products.



Electrical Specifications 电气参数


型号	Holder Type	7.0x5.0mm Ceramic Surface Mount
频率范围	Frequency Range	5.500 to 150.000 MHz
调整频差	Frequency Tolerance (ΔF) (at 25°C)	± 10 ppm to ± 30 ppm
温度频差	Frequency Drift	± 10 ppm to ± 30 ppm ※(See Notes)
工作温度范围	Operating Temperature Range	-20°C - +70°C / -40°C - +85°C
储存温度范围	Storage Temperature Range	-40°C - +85°C / -55°C - +125°C
老化	Aging (25°C)	± 3 ppm/ year max.
静电容	Shunt Capacitance (C0)	7pF max.
激励功率	Drive Level	100 μ W (300 μ W max.)
绝缘阻抗	Insulation Resistance (Rs)	500 Megaohms Minimum at D.C100V
负载电容	Load Capacitance (CL)	Suggested by customer

※Notes: ± 10 , ± 20 , ± 30 ppm (-20°C to +70°C)
 ± 20 , ± 30 , ± 50 ppm (-40°C to +85°C) or depends on customer

Equivalent Series Resistance and Mode of Operation 等效阻抗和振荡模式


Frequency Range 频率范围	ESR (Ω) 等效阻抗	Mode 振荡模式
5.500MHz $\leq f < 8.000$ MHz	100Max	基频 Fundamental
8.000MHz $\leq f < 10.000$ MHz	60Max	Fundamental
10.000MHz $\leq f < 14.000$ MHz	50Max	Fundamental
14.000MHz $\leq f < 20.000$ MHz	40Max	Fundamental
20.000MHz $\leq f < 40.000$ MHz	30Max	Fundamental
35.000 to 150.000 MHz	80Max	三次泛音 Third Overtone

Reflow Condition(回流焊条件)

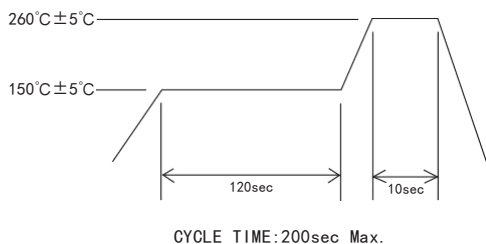


Mechanical Dimensions 外型尺寸

DB: TWO PADS (两电极)

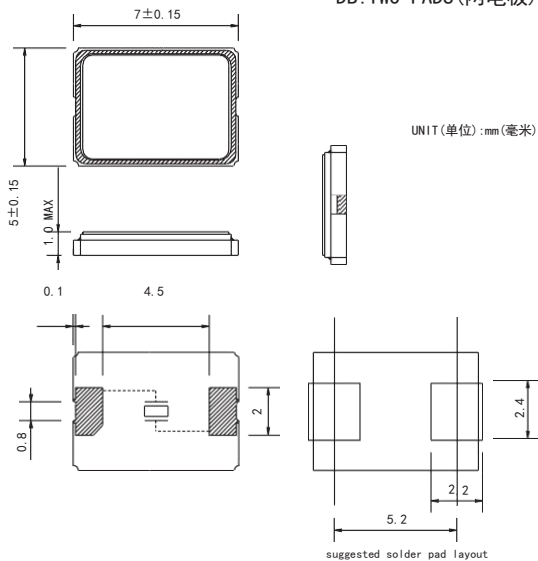

D: FOUR PADS (四电极)

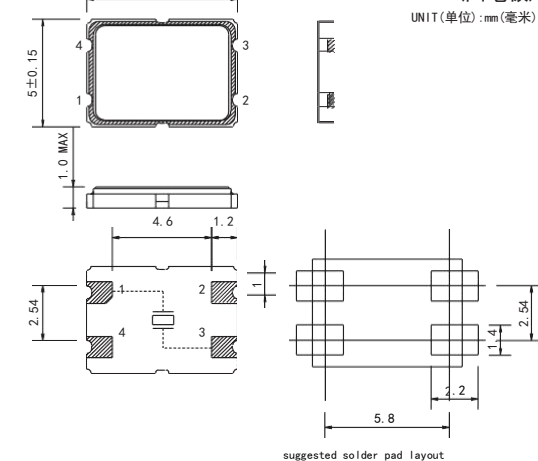

Note: #2, #4 is connected with a cover (Please connect with GND or floating.)

公司地址: 深圳市南山区西丽工业区第11栋4楼420
 工厂地址: 中山市港口镇恒丰路6号游戏游艺产业园4A栋3楼
 网 址: www.szrjdz.net

E-MAIL: szrojon@szrjdz.cn / QQ: 228125016
 电 话: 0755-86230705 0760-88516371
 传 真: 0755-86230743

